

COMPLIANCE STANDARDS



FAA L-864

Medium intensity flashing (30 fpm) red obstruction light

>> [Click here for L-864 product information](#)



FAA L-810

Low intensity steady burning/ flashing (30 fpm) red obstruction light

>> [Click here for L-810 product information](#)

fpm flashes per minute

IF PAINTED (SHOWN BELOW)

Day / Twilight Protection: aviation orange/white paint

Night Protection: 2,000 cd red lights

IF NOT PAINTED

Day / Twilight Protection: 20,000 cd white lights

Night Protection: 2,000 cd white lights

350 ft. and above *


6x L-864 medium intensity light flashing in sync at 30 fpm

150 – 350 ft. *

3x L-864 medium intensity light flashing in sync at 30 fpm
3x or more L-810 flashing in sync with L-864 at 30 fpm

150 ft. and below *

3x L-810 steady burning obstruction lights

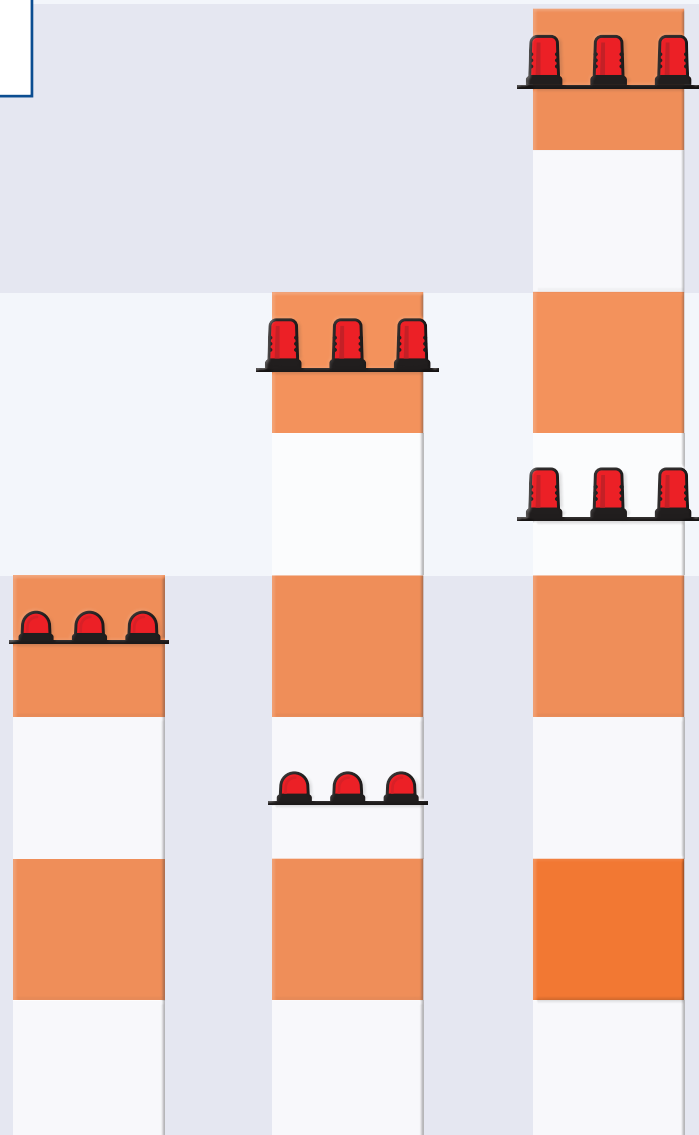

Note: Diagrams show minimum number of lights only. Total number of lights at each level is dependent on chimney diameter (top and bottom).

* Including any appurtenances

A0

A1

A2

Guidelines only. Please refer to [FAA AC 70/7460-1L](#) or contact us for further information and guidance.