

COMPLIANCE STANDARDS



FAA L-864/865

Medium intensity flashing (30 fpm) dual red white obstruction light

>> [Click here for L-864/865 product information](#)



FAA L-810

Low intensity steady burning/ flashing (30 fpm) red obstruction light


>> [Click here for L-810 product information](#)

fpm flashes per minute

Day / Twilight Protection: 20,000 cd white light

Night Protection: 2,000 cd red light and 32 cd side lights

(Painting of tower is typically not required)

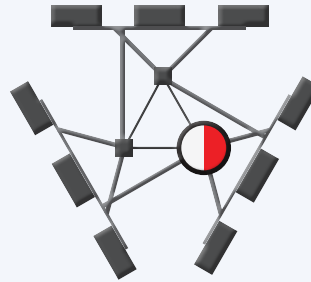


350 – 700 ft. *

3x L-864/865 medium intensity light flashing in sync at 30 fpm

200 – 350 ft. *

1x L-864/865 medium intensity light flashing in sync at 30 fpm

2x or more L-810 flashing in sync with L-864 at 30 fpm

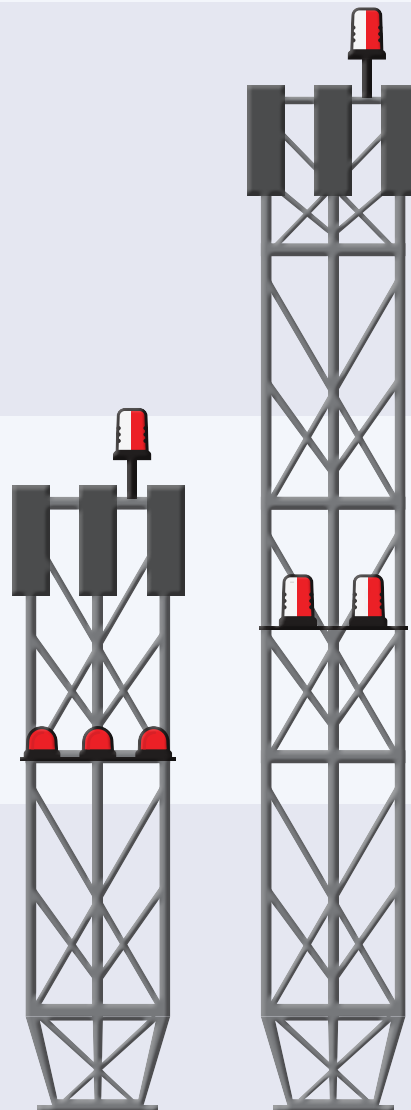

E1

E2

* Including any appurtenances

Guidelines only. Please refer to **FAA AC 70/7460-1L** or contact us for further information and guidance.